

M3

# CONCRETE MIXING BUCKET

## FOR SKID STEER LOADERS



### FEATURES

#### STANDARD EQUIPMENT ON NZ MODELS

Bottom and bolted helix made of wear resistant steel HB400

Fixed safety grill with bag breaker

Electric valve

Hydraulic hoses

Electric connection kit

Unloading pipe and side chute\*

Hydraulic opening of the bottom through a cylinder with covered rod

Attachment hitch plate

\*No side chute on BM 150

#### OPTIONS

Hydraulic opening of the safety grill including the safety valve

Opening of the safety grill through gas springs including the safety valve

Multi-hitch options


Flow adjuster & over pressure valve

Weighing system

Thermal printer

Radio control for bottom opening without electric line


Gas struts to open grid  
(BM 400 TD)  
Fixed on BM 150

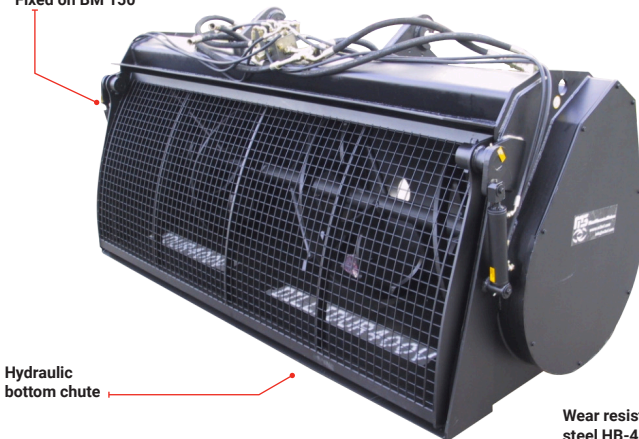

Hydraulic  
bottom chute

Wear resistant  
steel HB-400

Electric valve

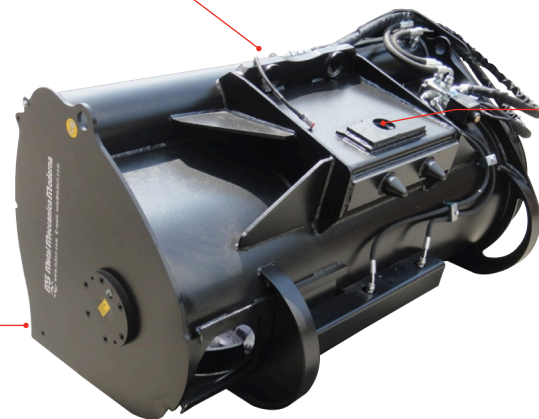

Attachment  
hitch plate

	Full load weight (kg)	Flow rate (Litre/min)		Max. pressure (BAR)
		min	max	
<b>BM 150</b>	<b>620</b>	<b>30</b>	<b>40</b>	<b>140</b>
<b>BM 400 TD</b>	<b>1440</b>	<b>35</b>	<b>75</b>	<b>210</b>

